


TOKU 

TMH SERIES AIR HOIST & TROLLEY LOW HEADROOM TYPE


Ver. 1.00

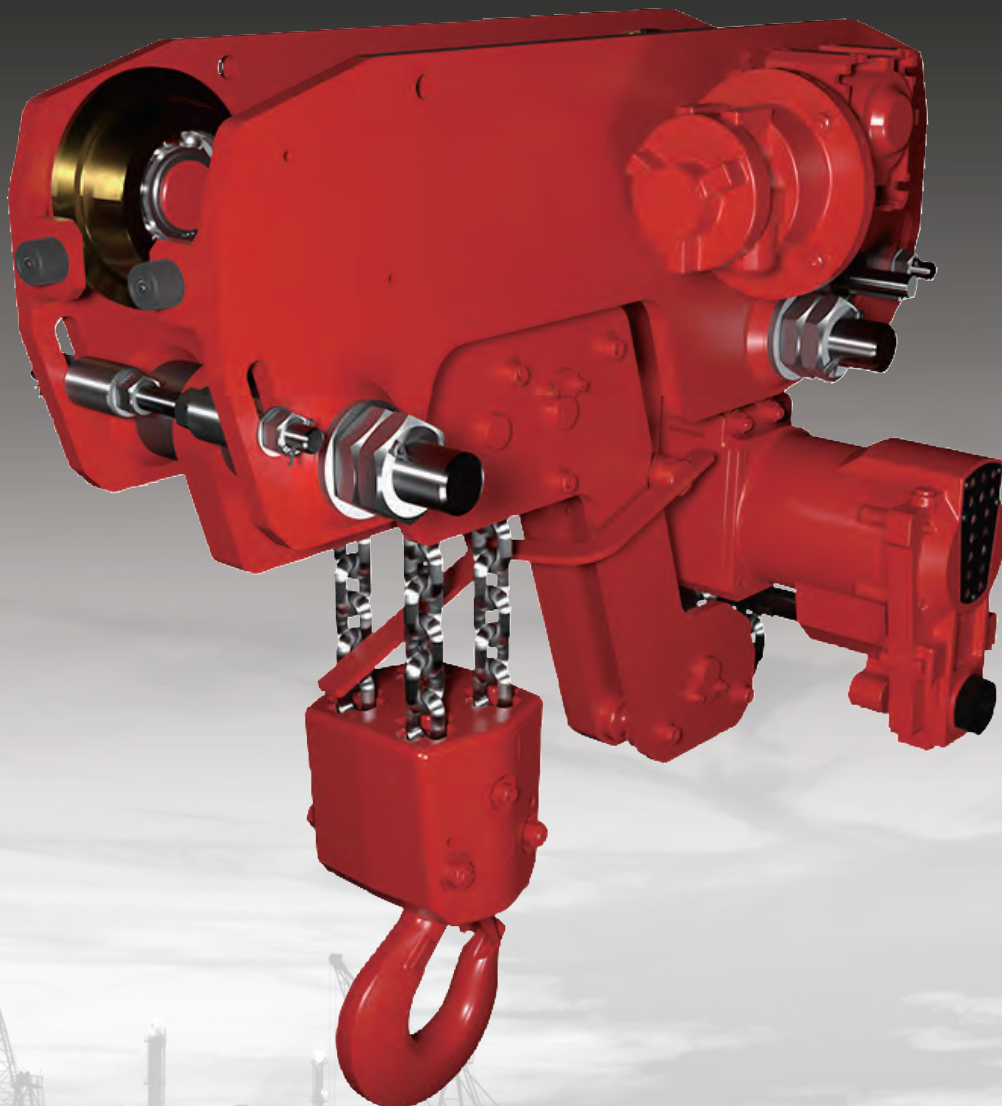

**RED ROOSTER
LIFTING**

Large Capacity Air Hoist & Trolley TMH Series

Low Headroom Type




Standard Features

- TMH air hoist with **highest level lifting speed** in the market.
- **Lowest headroom** trolley hoist in the market
- ATEX zone 2 Specification
- Robust 3 step planetary gear box
- Failsafe automatic internal disc brake
- Mechanical upper & lower limit switch
- Cast steel housing
- Internal silencing down to 80dB(A)
- Alloy safety swivel hooks with safety catch
- Automatic load limiter

Available Options

- Marine specification
- Collision bumpers
- Articulated trolleys
- ATEX zone 1 specification
- Rack & pinion drive
- Travel limits
- Main air shut off valve
- Air service units
- Festoon systems
- Radio control remote
- Special paint systems
- Beam brake
- Other travel speed

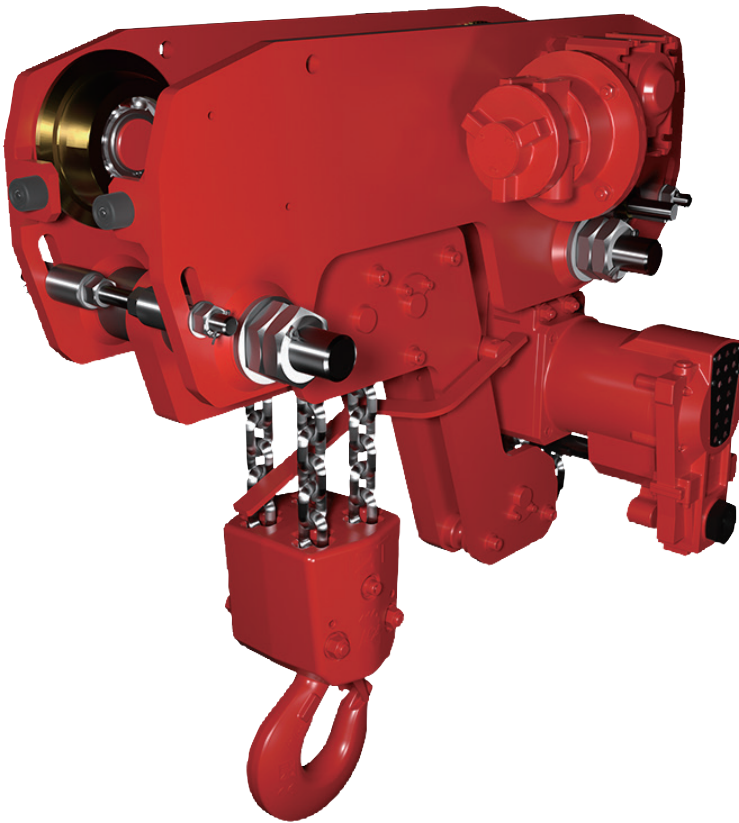

TMH-12000/4-LHR

Specifications


Model	Lifting Capacity (kg)	No. of Chain Falls	Lifting Speed (m/min)		Lowering Speed (m/min) w/Load	Air Consumption (m ³ /min)		Travel Speed (m/min)	Weight (3m HOL & Trolley)(kg)	Flange Minimum (mm)	Flange Max (mm)
			w/Load	wo/Load		Hoist	Trolley				
TMH-3000-LHR	3000	1	5.4	10.8	10.2	3.36	1.5	6	275	110	300
TMH-6000/2-LHR	6000	2	2.7	5.4	5.1	3.36	1.5	6	300	110	300
TMH-9000/3-LHR	9000	3	1.8	3.6	3.4	3.36	2.4	6	375	110	300
TMH-12000/4-LHR	12000	4	1.35	2.7	2.55	3.36	2.4	6	400	110	300
TMH-15000/5-LHR	15000	5	1.08	2.16	2.04	3.36	2.4	6	550	110	300

* Operating air pressure: from 0.4 to 0.6 MPa

Please visit our website for details : <https://www.toku-net.co.jp/en/>

Air Hoist & Trolley TMH Series

Ultra Low Headroom Type




Standard Features

- TMH air hoist with **highest level lifting speed** in the market.
- **Lowest headroom** trolley hoist in the market
- ATEX zone 2 Specification
- Robust 3 step planetary gear box
- Failsafe automatic internal disc brake
- Mechanical upper & lower limit switch
- Cast steel housing
- Internal silencing down to 80dB(A)
- Alloy safety swivel hooks with safety catch
- Automatic load limiter

Available Options

- Marine specification
- Special paint systems
- Rack & pinion drive
- ATEX zone 1 specification
- Collision bumpers
- Articulated trolley
- Main air shut off valve
- Beam brake
- Travel limits
- Air service units
- Festoon systems
- Radio control remote
- Other travel speed

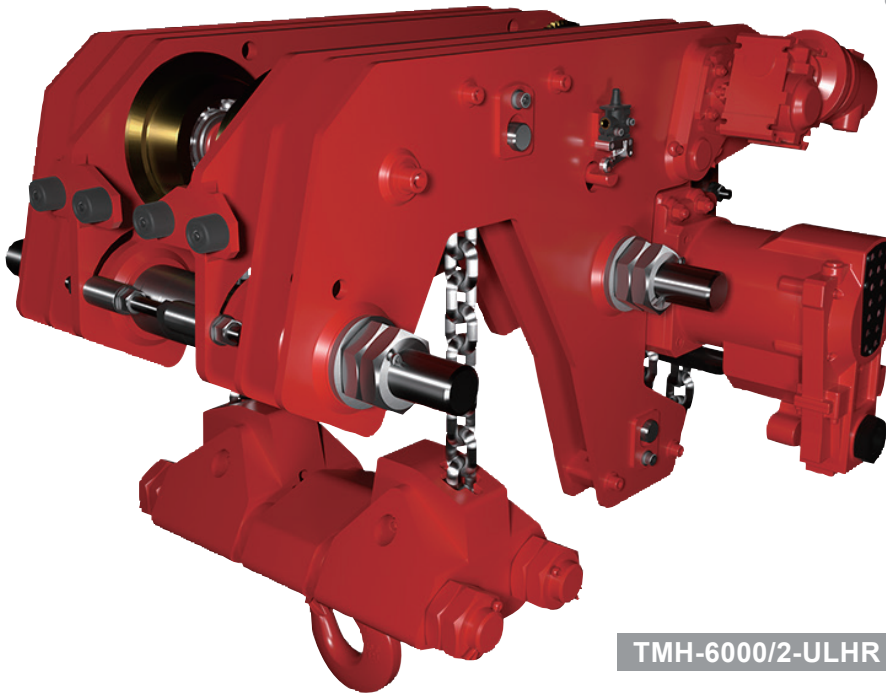

TMH-6000/2-ULHR

Specifications

Model	Lifting Capacity (kg)	No. of Chain Falls	Lifting Speed (m/min)		Lowering Speed (m/min) w/Load	Air Consumption (m ³ /min)		Travel Speed (m/min)	Weight (3m HOL & Trolley)(kg)	Flange Minimum (mm)	Flange Max (mm)
			w/Load	wo/Load		Hoist	Trolley				
TMH-6000/2-ULHR	6000	2	2.7	5.4	5.1	3.36	1.5	9	400	110	300

* Operating air pressure: from 0.4 to 0.6 MPa

Please visit our website for details : <https://www.toku-net.co.jp/en/>



Main Plant



Minobaru Plant



Kishima Plant



Hirokawa Plant



Kiyama Plant



Yamada Plant

TOKU PNEUMATIC CO.,LTD.

3-4, 4Chome,Katakasu, Hakata-ku, Fukuoka 812-0043 Japan

Phone : +81-92-431-0401

Fax : +81-92-431-1014

E-mail : int-op@toku-net.co.jp

URL : www.toku-net.co.jp/en/



EMS 89393/ISO 14001

DISTRIBUTOR